

WATERPROOFING SYSTEM DRINKING WATER TANK NEXASMART FLEX


NEXA COATINGS

Details and definition of the constructive solution for inclusion in a potable water tank waterproofing project using a flexible two-component technical mortar, NEXASMART FLEX. Depending on the technical and aesthetic requirements of each project, the system can be implemented using the membranes specified in the attached table.

Potable Water Tank Waterproofing

Waterproofing of the potable water tank using the application of flexible two-component technical mortar, NEXASMART FLEX, with a dosage of 0.2048 lb/ft² (1 kg/m²) per layer, applied in a minimum of 2 coats by projection, following cleaning, substrate preparation, treatment of singular points, and wetting the substrate according to the manufacturer's technical specifications.

The performance is 2 coats of between 0.205 to 0.410 lb/ft² (1-2 kg/m²) each.

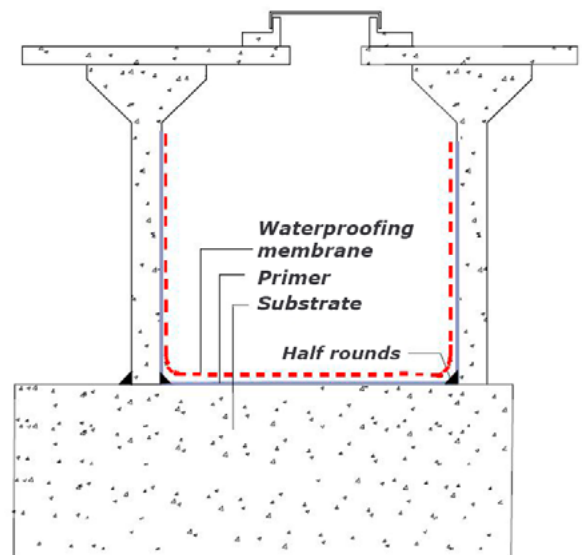

MEMBRANES AVAILABLE FOR THE SYSTEM

NEXA D 2K

NEXA POLYUREA

NEXASMART FLEX

1/2

NEXA COATINGS

C/ Aiguafreda 24
L'Ametlla del Vallès
08480 Barcelona Spain

✉ contact@nexacoatings.com
☎ contact: +34 656 43 74 36
🌐 www.nexacoatings.com

WATERPROOFING SYSTEM DRINKING WATER TANK NEXASMART FLEX

NEXA COATINGS

The adhesion of the material depends on the quality of the substrate. Proper substrate preparation, correct treatment of singular points, and the selection of the most appropriate primer are essential. Below, we outline some key considerations and refer you to the annex, where you can find more detailed information. Please note that these systems and treatments are generic and do not take into account the specific characteristics of each project, so we recommend contacting the technical or commercial support team in your area.

Substrate Preparation

Analysis and preparation of new or rehabilitated substrates
Ensure that the surfaces are smooth, clean, dry, and as hard as possible, following the guidelines provided in the "Preparation and Treatment Guide for Singular Points."

Repair surface defects, irregularities, cracks, and gaps using polyurethane sealant. (See www.nexacoatings.com)

Treatment of Singular Points

Intersections with downspouts, expansion joints, sharp edges, coves, mechanical fixations, cable penetrations, edge trims, and border treatments:

These should be addressed using NEXA MASTIC PU polyurethane sealant or mesh, according to the diagrams provided in our "Preparation and Treatment Guide for Singular Points." (See www.nexacoatings.com)

Priming

Depending on the quality, porosity, or nature of the substrate to be coated, or the type of product to be used, it may be necessary to apply, with a consumption of 0.02 to 0.09 lb/ft² (0.100 to 0.450 kg/m²), one of the following primers: NEXA PRIMER EPOX W or NEXA PRIMER PU 2K. Some waterproofing applications may require a vapor barrier, which can be created with NEXA PRIMER EPOX W (0.12–0.20 lb/ft² (0.6–1 kg/m²) depending on the substrate's porosity). (See www.nexacoatings.com)



2/2

NEXA COATINGS

C/ Aiguafreda 24
L'Ametlla del Vallès
08480 Barcelona Spain

✉ contact@nexacoatings.com
☎ contact: +34 656 43 74 36
🌐 www.nexacoatings.com